

secuENTRY pro 5710 Transponder

Order no.: 57100


Technical details.

Power supply	Battery-free passive transponder
Range	Approx. 2 mm
Applications	<ul style="list-style-type: none">• Passive transponder as opening medium• Passive transponder as visitor transponder (access rights and validity duration can be programmed)
Standard	MIFARE DESFire 128 Bit encrypted in ISO format 15693 and 14443A
Data transfer	Contactless data transfer, AES encrypted


Areas of use. Only for secuENTRY 7000.

Ideal for hotel use or for limited access rights


secuENTRY pro 5710 Transponder.

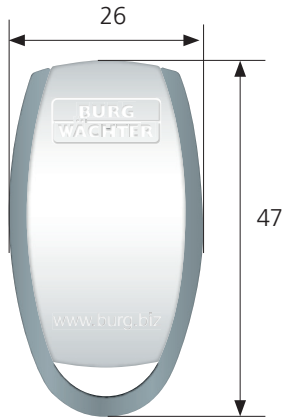

Front view

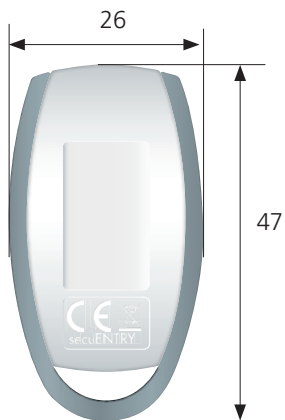

Rear view

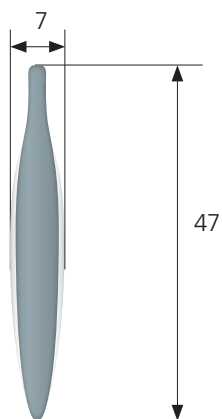

Side view

Dimensions in mm | Fig. 1:1

Product illustration.



secuENTRY Identification media

Product information.

Modern passive transponder

Transponder can be programmed into the software via QR code

Reading and writing of transponder via secuENTRY pro 7073 Enrolment

Compatible with:

- secuENTRY pro 7000 Cylinder
- secuENTRY pro 7030 Half cylinder
- secuENTRY pro 7073 Enrolment

ISO 15693 and ISO 14443A, 13.56 MHz

Easily programmable access rights and validity durations via optional software

Scope of delivery:

- secuENTRY pro 5710 Transponder
- QR code for training regarding the products
- Operating instructions